

Supplementary material to

EFFECTS OF EXHAUST GAS RECIRCULATION ON DIESEL ENGINE USING HYBRID BIODIESEL

Ananthakumar Sudalaimani¹, Barathiraja Rajendran^{2*}, Thiyagaraj Jothi³, Ashokkumar Mohankumar⁴

¹Department of Mechanical Engineering, Government College of Engineering, Tirunelveli - 627 007, Tamil Nadu, India

²Department of Mechanical Engineering, Einstein College of Engineering, Near MS University, Tirunelveli - 627 012, Tamil Nadu, India

³Department of Mechatronics Engineering, Er. Perumal Manimekalai College of Engineering, Hosur - 635 117 Tamil Nadu, India

⁴Department of Mechanical Engineering, Government College of Engineering, Bargur, Krishnagiri - 635 104, Tamil Nadu, India

Chem. Ind. Chem. Eng. Q. 30 (3) 179–192 (2024)

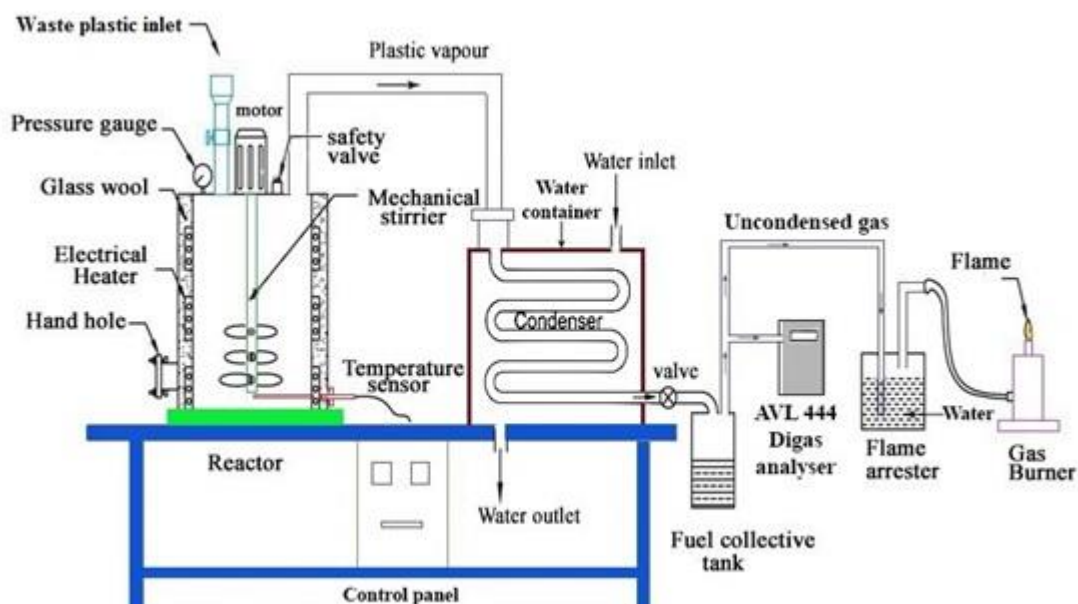


Figure S1. The pyrolysis plant's schematic design.

*E-mail: barathiraja.r@einsteincollege.ac.in



Figure S2. The EGR unit.